

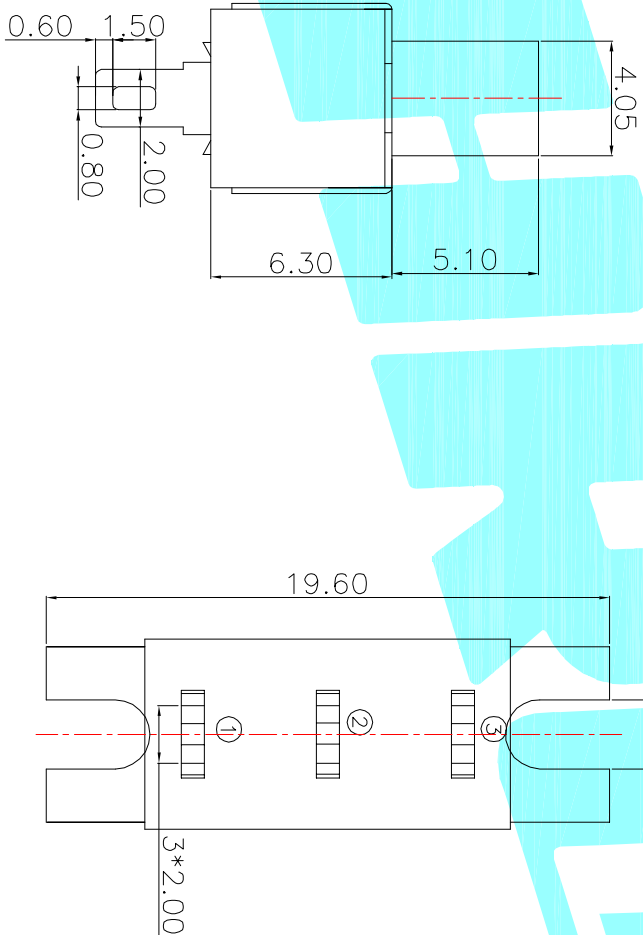
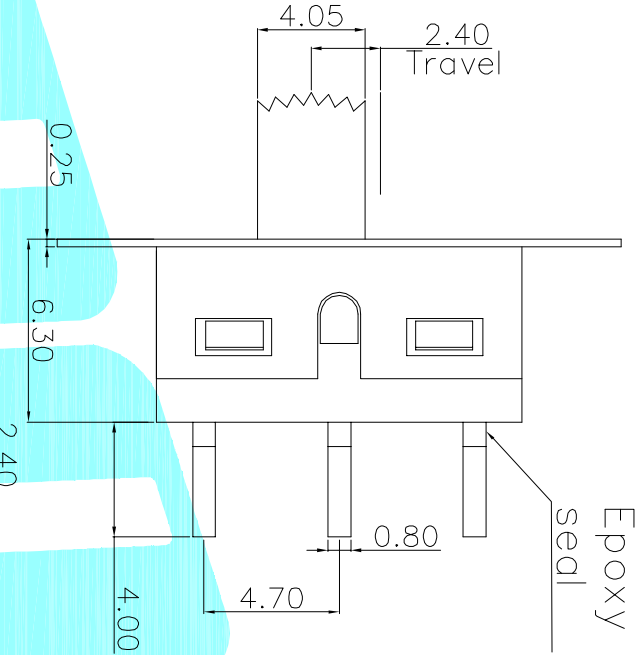


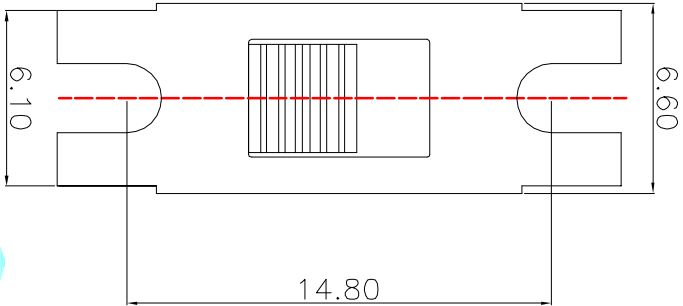

- Typical Specifications
1. Rating : 5A120V AC
 2. Insulation Resistance:1,000M min
 3. Dielectric Strength:1,500V RMS
 4. Operating Life : 30,000 cycles



Circuit Diagram

PART NO	vigor
1	300±100

⑤	Terminal	—	4	Copper	Plating silver	—
④	Contact	—	1	F.Ag/C5210	—	—
③	Base	—	1	PA	Black	—
②	Cover	—	1	SPCC	Plating Sn	—
①	Keystoke	—	1	PA	RED	—
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK

APPROVALS	DATE	HROELECTRONICS CO.,LTD
DRAWN	2015.05.25	
CHECKED		

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			
TOLERANCES ARE						
30~12.5 ±0.30						
10~30 ±0.20						
5~10 ±0.15						
~5 ±0.10						
ANGLE						
±2°						
UNIT: mm						
SCALE: 1:1						
PROJ: 1 OF 1						