


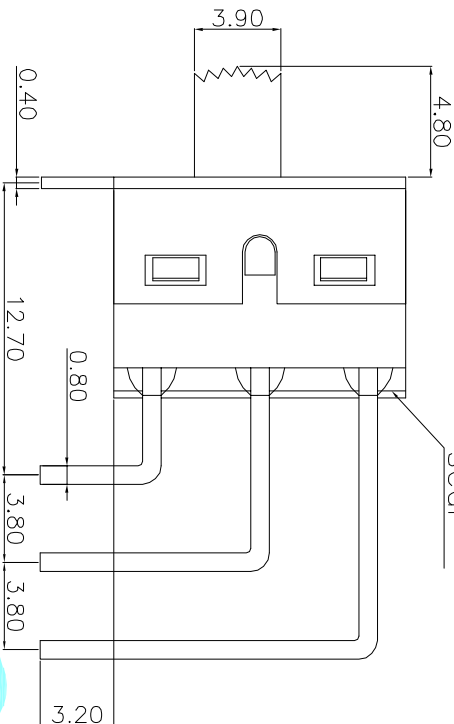
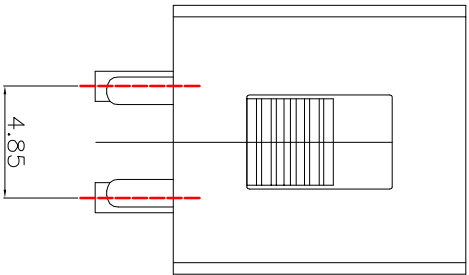




- Typical Specifications
1. Rating : 5A120V AC
 2. Insulation Resistance:1,000M min
 3. Dielectric Strength:1,500V RMS
 4. Operating Life : 30,000 cycles

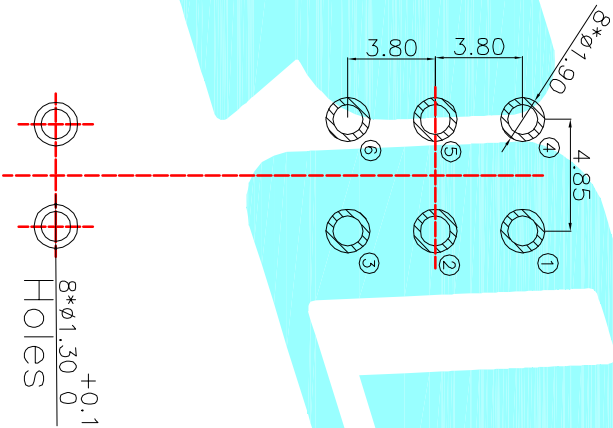

Circuit Diagram

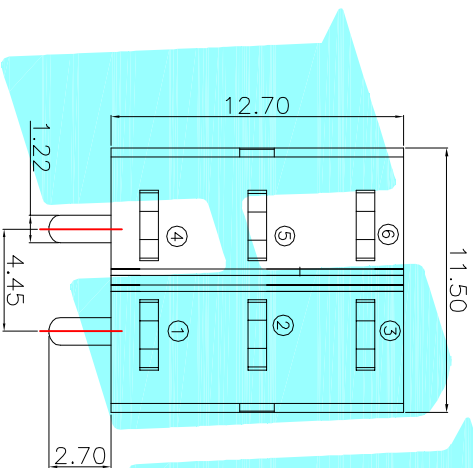

PCB Layout(pattern side)

PART NO	vigor
1	300±100

ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
⑤	Terminal	—	6	Copper	Plating silver	—
④	Contact	—	1	F.Ag/C5210	—	—
③	Base	—	1	PA	Black	—
②	Cover	—	1	SPCC	Plating Sn	—
①	Keystoke	—	1	PA	RED	—

APPROVALS	DATE	TITLE
DRAWN	JIANKUN.LIU	2015.05.25
CHECKED		
APPROVALS		

OKHRO®
ELECTRONICS CO.,LTD

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			